





# DUSTLESS BLASTING

## WETBLAST FLEX™ ALL-IN-ONE WETBLAST SYSTEM

Our all-in-one WETBLAST FLEX™ system gives you convenience you don't get from traditional slurry systems. Its design and simplified set up and operation make for easier end-of-shift shutdown. By mixing the abrasive and water after it leaves the blast machine, you never have to empty a machine of a messy water/abrasive mix.

Flexible set up options allow you to position the water injector either at the base of the blast machine or at the nozzle \_ your choice. With the injector at the nozzle, you can adjust the water/abrasive mix at any time.

You can dry-blast with the FLEX, simply remove the injector adaptor mounted at the base of the machine, and turn off air to the pump.

- 
**SKID MOUNTED**  
 All in one convenient design with fork lift pockets and lifting eyes.
- 
**WATER SOURCE**  
 Use the on board water tank or connect the system to a municipal water source.
- 
**ABRASIVE CUT OFF SWITCH**  
 With injector and ACS at the nozzle, you can control wash down and surface blow off without a trip to the blast machine.
- 
**NO POT TENDER NEEDED**  
 With the injector adaptor and ACS mounted at the nozzle, there's no need for a pot tender.



### FLEX - \*BASE UNIT

6 ft<sup>3</sup> Blast Machine with Pneu Remotes and 50 ft Control Line  
 120 Gallon Water Tank  
 Wetblast Injector™ Pump Module  
 Base-Mount Wetblast Injector™  
 Standard Wetblast Injector™ with 50' Hose  
 Abrasive Cut-Off Switch  
 Blast Machine Screen & Cover  
 1 1/2" Pressure Regulator & Air Filter  
**Contractor Thread : Stock No. 28434**  
**1-1/4" Thread: Stock No. 28436**

### FLEX - PACKAGE

Base Unit	50' Coupled Supa Hose
#8 Long-Venturi Nozzle	Apollo 600 HP DLX
Clem-Cool Air Conditioner	50' Respirator Hose
CPF-20 (installed on skid)	Nominal Spares
<b>Contractor Thread : Stock No. 28435</b>	
<b>1-1/4" Thread: Stock No. 28437</b>	
Dimensions: 68" L x 46" W x 52" H	
Base Weight: 1450 LBS	
Package Weight: 1550 LBS	

\* Systems differ with choice of nozzle injector adaptor \_ contractor or fine thread.

Stock No. 28426

[www.clemcoindustries.com](http://www.clemcoindustries.com)  
 © 2015 Clemco Industries Corp.

0115 Rev.A 03/15

## RECOMMENDED ABRASIVE MEDIA

# GLASSACTION

## CRUSHED GLASS

## Wetblast Injector Systems

# CLEMCO




**High-Performance  
Dust Reduction For  
Blast Cleaning**



- *Reduces airborne job site dust*
- *May eliminate need for costly containment*
- *Improves coating adhesion by removing soluble salts and corrosives*
- *Reduces premature coating failures*

The Clemco Wetblast Injector System adds the dust-suppressing power of water to any blast machine with a pump-driven system that injects water into the abrasive stream before it exits the nozzle. The system allows the operator to meter the desired amount of water into the high-velocity air/abrasive stream for hard-hitting, high-performance blasting and a dramatic reduction of airborne dust normally present in dry abrasive blasting.

Because the Clemco Wetblast Injector System introduces water into the abrasive before it exits the nozzle, each abrasive particle is wet. This feature greatly improves blast surface visibility for the operator and outperforms water ring systems.

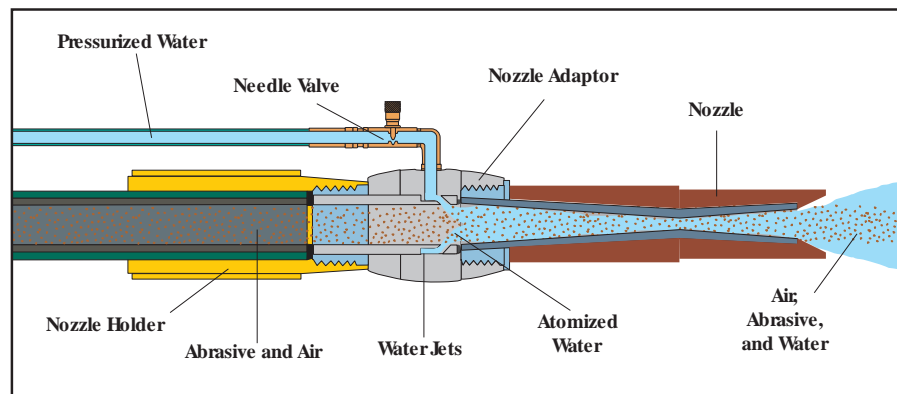

### Operation

The power behind Clemco's Wetblast Injector rests in our exclusive 10:1 pump. It uses compressed air to inject water into the high-velocity abrasive/air stream at the nozzle. A single pump can easily operate two nozzles, each with independent controls. Simply purchase an additional nozzle adaptor and add one more hydraulic hose to the water outlet.

The Wetblast Injector System requires no electric power, so there are no wires and no connections to short or shock.

Because the system has its own pump and uses relatively small amounts of water, any source of clean water will work — household tap, water tower, or low-lying tank.

A regulator with pressure gauge, mounted inside the control box, controls water pressure. The operator adjusts the water volume with a one-thread needle valve at the nozzle.

The versatile Wetblast Injector lets the operator blast in wet or dry mode. When the machine is equipped with an abrasive cut-off system, the operator can rinse the surface with air and water, then dry the surface with high-pressure air.



Applications

A blast system with Clemco's Wetblast Injector quickly cleans structural steel to any degree of cleanliness from brush-o to white metal. After blasting, the water-and-air rinse removes soluble salts and other corrosives that can cling to the surface. If ash rust is a problem, the pump can siphon clean water from a static-holding tank that contains a pre-mixed rust inhibitor solution to retard rust development on exposed steel.



With so many variables - blast pressure, water pressure and volume, blast media, and operator technique – The Wetblast Injector enhances the versatility of any abrasive blast system.

NOTE: All components of the Wetblast Injector System are required for proper operation. The nozzle adaptor cannot be used independently.

Breathing dust from abrasive blasting, even when using the Wetblast Injector System, can be hazardous. Wear a NIOSH approved blast respirator. Follow the instructions provided with the respirator.

Specifications

Table with 4 columns: Component, Dimensions, and two columns for specifications in imperial and metric units. Rows include Wetblast Enclosure, Water Pump, Air Consumption, Pump Capacity, Hydraulic Hose, Fittings, and System Shipping Weight.

All Clemco Wetblast Injector Systems include the wetblast enclosure, pump, nozzle adaptor assembly, and hydraulic hose. Systems are offered to fit three nozzle styles. Select the system that fits the thread and entry of the nozzle you intend to use. Order nozzles separately.

Ordering Information

Table for ordering information with columns for System Descriptions, One Operator, and Two Operators. Includes nozzle specifications and footnotes for system configurations.



Clemco is committed to continuous product improvement. Specifications are subject to change without notice. ISO 9001:2008 certified. © 2014 Clemco Industries Corp., One Cable Car Drive, Washington MO 63090. Phone 636 239-4300 • FAX 800 726-7559 • Email: info@clemcoindustries.com

Stock No 09321 • 0483 Rev. H 07/14